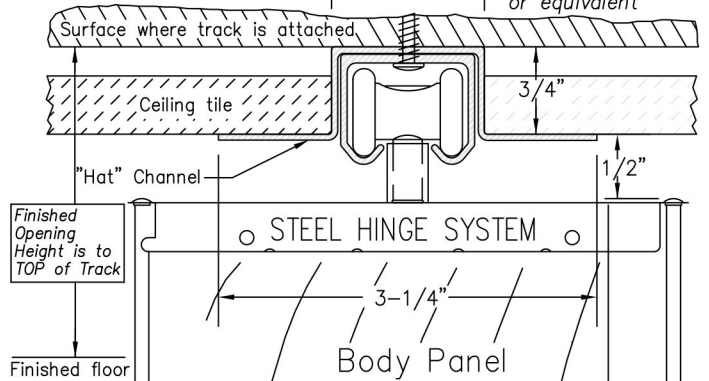


Pan head screw supplied
by manufacturer
or equivalent



I-Beam Track

Surface where track is attached

1-3/16"

Ceiling clips 1/2" wide, typically placed 12" apart

Not recommended for recessed installation.

1-7/8"

Finished Opening Height:
We suggest Field Measure

Finished floor

1/2" wide

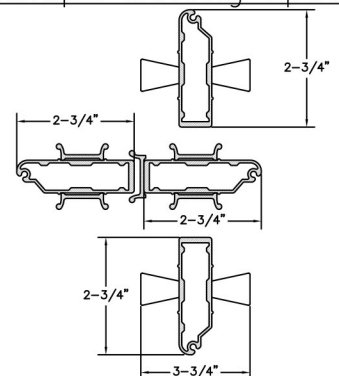
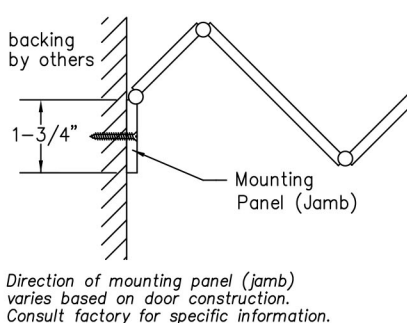
STEEL HINGE SYSTEM

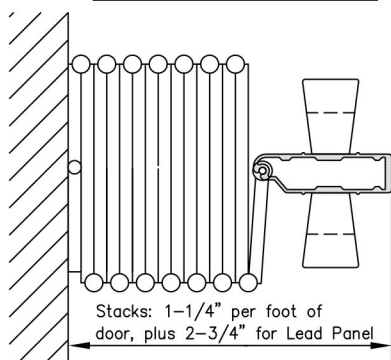
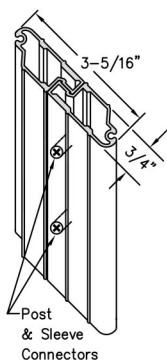
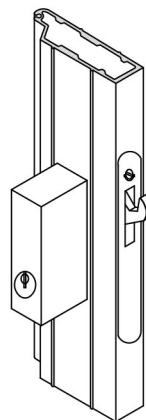


The diagrams show four types of spring connections:

- Single Left Hand:** A zigzag spring line starting from a fixed wall on the left and ending at a sliding block on the right.
- Single Right Hand:** A zigzag spring line starting from a sliding block on the left and ending at a fixed wall on the right.
- Double End:** A zigzag spring line with fixed walls at both ends, and a sliding block in the middle.
- Pair:** Two separate zigzag spring lines, each with a fixed wall at one end and a sliding block at the other.

The image contains two technical drawings of door handle and latch assemblies. The left drawing is for 'Doors without keylocks' and shows a handle with a 'Finger Opening' and a latch with a '3/4\"

Multiple Meeting Option



Stack DimensionsIntermediate Rolling PostPrivacy LatchKeylockSingle Cremone Bolt KeylockDouble Cremone Bolt KeylockINFORMATION

Width	Custom made to any width
Height	Custom made to 10' -1"
Panels	Acrylic, natural hardwood or vinyl-lam
Side Channel	Aluminum: White, Brown, Sand or Clear
Panel Connector	Rigid Vinyl: White, Brown, Sand or Clear Coordinated with side channel
Hinge System	Steel: Dark Bronze or Clear
Wheels	Ball bearing nylon wheels on steel axles
Track	Aluminum (straight or curvable): Dark Bronze or Clear
Recessed Channel/ "Hat" Channel	Aluminum (straight only): White
Lead, Intermediate and Jamb	Aluminum: White, Brown, Sand or Clear Coordinated with side channel
Latch	Deadlatch with Key Lock two sides
Header	Construction Details by Others
Door Weight	<u>Height</u> 6'-8" 10lbs. Per lineal foot 8'-1" 12lbs. Per lineal foot 10'-1" 15lbs. Per lineal foot 12'-1" 18lbs. Per lineal foot

See Woodfold Accordion Door brochure for additional details

Catch/Lock Options

Magnet	Magnet with strike plate
Privacy Latch	Deadlatch with thumb turn one side
Springlatch	Springlatch with thumb turn two sides
Keylock 1 Side	Deadlatch with thumb turn one side, keylock one side
Key and Single Bolt	Key and single bolt lock
Key and Double Bolt	Key and double bolt lock
Single Cremone	Single Cremone Bolt with Key Lock
Double Cremone	Double Cremone Bolt with Lock
Footbolts	Locking or non locking
Other Keyed Options	Keyed alike, custom keyed, construction core Contact manufacture for more details

Job Name: _____

Job Location: _____

Supplier: _____

Architects Acceptance

Qty.	Single/Pair	Single End/Double End	Left or Right Stack	Width X Height	Finish/Color	Comments

THESE SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE



**SOUNDPROOF
ACCORDION
DOORS**

Address:

2731 Vista Pkwy D-6, West Palm
Beach, FL 33411, United States

Phone:

561-964-9360